



#4

**PATENT APPLICATION****IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of

Laurent LABRUNIE, et al.

Attorney Docket No. Q67909

Appln. No.: 10/035,303

Group Art Unit: 2874

Confirmation No.: 1962

Examiner: Unknown

Filed: January 04, 2002

For: OPTICAL FIBER TRANSMISSION SYSTEM WITH ENHANCED TOTAL  
LAUNCHABLE OPTICAL POWER

**SUBMISSION OF PRIORITY DOCUMENT**

Commissioner for Patents  
Washington, D.C. 20231

Sir:

Submitted herewith is a certified copy of the priority document on which a claim to  
priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to  
acknowledge receipt of said priority document.

Respectfully submitted,

David J. Cushing  
Registration No. 28,703

SUGHRUE MION, PLLC  
2100 Pennsylvania Avenue, N.W.  
Washington, D.C. 20037-3213  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

Enclosures: Europe 01400009.5

Date: February 12, 2002





**Eur päisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

Q67909  
1961

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

01400009.5

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**

DEN HAAG, DEN  
THE HAGUE, 08/01/02  
LA HAYE, LE





**Eur päisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: **01400009.5**

Anmeldetag:  
Date of filing:  
Date de dépôt: **04/01/01**

Anmelder:  
Applicant(s):  
Demandeur(s):  
**ALCATEL**  
**75008 Paris**  
**FRANCE**

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

**Optical fiber transmission system with enhanced total launchable optical power**

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

**H04B10/18**

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:



## Optical fiber transmission system with enhanced total launchable optical power

5 The invention refers to an optical fiber transmission system according to the first portion of claim 1.

Especially in telecommunication optical fiber transmission systems are used to transport optical signals over long distances. In order to increase the amount of information to be transmitted via such a system, the optical signal being launched into the fiber by a transmitter terminal is composed of a number of bit-patterns at different wavelength channels within a total bandwidth of wavelengths. The total launchable bandwidth is limited by the characterizing features of the fiber. Thus, it is a common aim to space the individual wavelength channels as little from each other as possible. 64 channels at a channel separation of 0.8 nm covering a total bandwidth of 52 nm are typical values.

15 The optical powers guided by the fiber can be quite high. This is of special interest if long distances across large marine sections have to be bridged. Because of obvious reasons of maintainance submarine repeater stations should be avoided or at least their number should be minimized. This means, that the signal power launched into the fiber has to be maximized to guarantee the receipt of a signal large enough to be reliably detected by the receiver terminal at the far end of the fiber line. However, the maximum total power of the optical signal cannot be increased up to any degree without degrading the signal quality. There are several effects like line broadening, non-linear impairment and channel cross talk, that worsen the signal quality. On the other hand, especially, when the different wavelength channels are very close together, a good signal quality is essential for a reliable de-multiplexing in the receiver terminal.

25 The critical figure, which determines the maximum launchable total power is the so called optical power budget. The power budget is defined as the difference between the average optical power per wavelength channel launched into the fiber and the worst sensitivity of the wavelength channels involved. Both, the average power and the sensitivity usually are expressed in dBm. The sensitivity of a wavelength channel is defined as the minimum optical power, that has to be launched into this channel to generate a reliably detectable signal at the input of the receiver. Thus, the optical power budget, usually expressed in dB, can be interpreted as the usable surplus of optical power over the losses due to any kind of signal degradation.

One of the main degradation effects in signals of high optical power is the depletion of the short wavelength channels in favor of the longer wavelength channels, known as the „stimulated Raman effect“, an inelastic stray process. The stimulated Raman effect is explained quantum-mechanically by the virtual excitation of a molecule of the fiber by an incoming photon of a given energy. A second photon of lower energy, i.e. of a longer wavelength, stimulates the deexcitation of the virtual state, i.e. the emission of a photon. The emitted photon has got the same characteristics, namely the same wavelength and the same direction as the stimulating second photon. Thus, the shorter wavelength channels are depleted in favor of the longer wavelength channels by the stimulated Raman effect. Because of this effect, a tilt in the distribution of wavelength channels can be observed. The tilt increases with the distance, the optical signal has passed through the fiber. Fig. 1b schematically shows the distortion of a signal consisting of several wavelength channels of equally distributed signal power, as shown in fig. 1a, where  $p_{in}$  is the power launched per channel,  $p_{out}$  is the power per channel reaching the receiver and  $\lambda$  is the wavelength. As a partial remedy, it is known to launch a distorted signal, according to fig. 2a, into the fiber. This yields a flat distribution of power at the far end of the fiber line. However, this way of compensation has severe disadvantages.

The importance of the stimulated Raman effect is, on the one hand, a function of the short wavelength channels' optical power. On the other hand it is depending on the number and strength of the possible deexcitation paths, i.e. the number and power of the longer wavelength channels. If the optical powers are equally distributed amongst the channels, the resulting tilt can mathematically be expressed as the product of the total optical power launched into the fiber times the total bandwidth of wavelengths. This means, the higher the optical power launched to the fiber, the higher is the degradation of the short wavelength channels, i.e. the worse the quality of the signal. It also means, that it is the shortest wavelength channel, whose sensitivity is worst in the system. The optical power budget is, thus, defined relative to this channel. However, if for reasons of compensation, a distorted signal is launched, i.e. the short wavelength channels are overemphasized, the non-linear impairment between the channels becomes stronger.

In the regime of relatively low total optical powers the optical power budget is governed by linear stray processes. An increase of the optical power launched into the fiber yields an almost linear increase of the optical power budget. This linear behaviour can be read from the left part of the graph 20 in fig. 3. Fig. 3 shows the experimentally determined optical power budget (oPB) as a function of the total power ( $P_{in}$ ) launched



into the fiber. The data shown were taken in a system of 64 wavelength channels covering a total bandwidth of 52 nm. At a total optical power of about 27.5 dBm the power budget shows a sharp kink and starts to decrease rapidly from its maximum value of about 49 dB. This kink can be explained by the non-linear effect of stimulated Raman emission, which takes over the government of the power budget at high optical powers. The figure clearly shows the limits of power increase as a means of signal enhancement. The term „maximum total optical power“ will be used for the total optical power associated with the maximum optical power budget.

It is a specific object of the invention to provide an optical fiber transmission system, which allows, compared to known systems, the input of higher optical powers while simultaneously increasing the optical power budget.

To this end the total optical bandwidth to be launched into the fiber line is divided in at least two wavelength domains before launching. Each wavelength domain consists of a multitude of individual wavelength channels. The domains do not overlap. Each one is fed into an individual, dedicated optical fiber, while the optical power budget is optimized for each of the fibers individually. After a certain distance, which is long enough to cause a decrease of the total power below a certain threshold, the signals of the individual fiber branches are multiplexed into one unique fiber guiding the multiplexed signal to the receiver terminal. The threshold mentioned is defined by the maximum total optical power launchable into the unique fiber. This threshold must not be exceeded by the sum of the total optical powers multiplexed together plus multiplexer losses.

As explained before, the extent of the tilt is depending on the product of the total optical power times the bandwidth covered by this power. If now the total bandwidth is split into several domains and each domain is launched into a dedicated fiber, the bandwidth per fiber - the first factor of the product in question - is reduced. Keeping constant the total power per fiber - the second factor of the product in question - means a respective increase of the average optical power per channel. This increase leads, according to the definition, to a direct increase of the optical power budget. On the other hand, the tilt is still reduced compared to a one-fiber-system. This fact allows a less severe compensation, i.e. the distortion of the power distribution launched into the fiber doesn't have to be as strong as in a one-fiber-system. This means especially, that the optical power of the short wavelength channels can be reduced, which yields a reduction of the non-linear impairment and an improvement of the shortest channel's sensitivity.

If the different wavelength domains are multiplexed into one unique fiber not earlier than the sum of the total powers of all the branches has decreased below the maximum total power launchable into the unique fiber, the profit of the increased power budget can be preserved. The improvement can easily be seen from fig. 4. Fig. 4 shows the optical power budget (oPB) as a function of the total optical power ( $P_{in}$ ) comparing a conventionally configured system (solid line 20) to a system configured according to the invention (dashed line 21).

It is preferred to split the total bandwidth only into two separate domains being launched into two dedicated fiber branches. For telecommunication most conveniently the two domains of the so called C-band (typically 1529 – 1562 nm) and the so called L-band (typically 1569 – 1604 nm) are used. The dashed line 21 in fig. 4 represents such a system, where both, the C- and the L-band contain 32 channels each. The system represented by the solid line 20 is the same as in fig. 3 explained further above. Splitting the total bandwidth, while keeping constant the average power per channel would decrease both factors of the tilt-product by a factor of two (half the total bandwidth and half the total optical power would be launched into each branch). However, it is preferred to rather keep constant the total power per fiber. This means, the average power per channel can be increased by a factor of two. This is equivalent to an increase of 3 dB, which directly yields the same increase of the optical power budget, as can be read from fig. 4. Taking into account the additional profit of lower non-linear impairment due to a smaller tilt-compensation by overemphasizing the short wavelength channels and also taking into account the inevitable losses of the multiplexing procedure - about 0.8 dB in the example given -, a total profit of about 3.2 dB increase of the optical power budget is achieved.

Fig. 5 schematically shows the setup of a preferred embodiment of the transmission system according to the invention. A transmitter terminal 10 is provided with two optical fiber amplifiers 11a and 11b amplifying the input signal of the L-band and of the C-band respectively. These two wavelength domains are launched into two different, dedicated fiber branches 12a and 12b respectively. It is preferred to optimize the optical input power for each branch individually. That means, the maximum launchable optical power, yielding a maximum optical power budget, is fed into each of the fiber branches 12a, 12b, as indicated by the flash-like arrows  $P_L^{max}$  and  $P_C^{max}$ . Most advantageously the dedicated fiber branches 12a, 12b are embedded in terrestrial fiber cables, preferably in only one terrestrial fiber cable. After having passed a certain distance through the fiber branches 12a, 12b, the two wavelength domains are

5 multiplexed together by means of a multiplexer station 13. This station 13 must not be closer to the transmitter station 10 than the optical powers of the signals in the two fiber branches 12a, 12b have decreased in a way, that their sum does not exceed the maximum optical power  $P_{MUX}^{max}$  launchable into the unique fiber 14, taking into account the multiplexer losses. In fact, there is a certain loss of optical power due to the multiplexing mechanism. Thus, the sum of powers of the C- and the L-band may exceed  $P_{MUX}^{max}$  by this amount. Preferably the multiplexer station 13 is situated close to the beach line of a marine section to be bridged by the fiber line. The unique fiber 14 is preferably embedded in a submarine fiber cable.

10 It is obvious, that a physical transmission network can involve several systems according to the invention in parallel. The parallel branches can all be embedded in one cable. In this case the multiplexer station 13 would multiplex the wavelength domains of each pair of branches into one of several, parallel unique fibers being embedded in a single cable. It is also possible to split the total bandwidth of wavelengths into more than  
15 two domains.



## CLAIMS

1. Optical fiber transmission system, comprising a transmitter terminal (10)  
5 launching an optical signal into a fiber line, said fiber line guiding said signal to a receiver terminal, said signal being composed of a multitude of bit-patterns at different wavelength channels within a given total bandwidth of wavelengths,  
characterized in that :  
- the fiber line consists, in its first section, of at least two branches (12a, 12b),  
10 - said transmitter (10) launching into each one of said branches (12a, 12b) a separate part of said optical signal being composed of a sub-multitude of said bit-patterns at neighbouring wavelength channels within non-overlapping bandwidth domains,  
- said parts of the signal being multiplexed together into one unique fiber (14)  
15 by means of a multiplexer station (13) not closer to said transmitter terminal (10), than the sum of the total optical powers guided by each of the branches (12a, 12b) plus the losses due to the multiplexing has decreased below the total optical power, that is associated with a maximum optical power budget in said unique fiber (14) guiding the full bandwidth of wavelengths.
- 20 2. Transmission system according to claim 1, characterized in that the full bandwidth of wavelength is split into two domains.
3. Transmission system according to claim 2, characterized in that the the C-band of approximately 1529 – 1562 nm and the L-band of approximately 1569 – 1604 nm are used as bandwidth domains launched into dedicated fiber branches (12a,  
25 12b).
4. Transmission system according to one of the preceding claims, characterized in that the two fiber branches (12a, 12b) are embedded in the same terrestrial fiber cable.
5. Transmission system according to one of the preceding claims, characterized  
30 in that the unique fiber (14) is embedded in a submarine fiber cable.
6. Transmission system according to one of the preceding claims, characterized in that the multiplexer station (13) is situated closed to a beach line.
7. Transmission system according to one of the preceding claims, characterized by that several of such transmission systems are used in parallel to constitute a  
35 transmission network.

8. Transmission system according to claim 7, characterized in that the according fibers of the parallel systems are embedded in the same fiber cables.

## ABSTRACT

The invention refers to an optical fiber transmission system, comprising a transmitter terminal (10) launching an optical signal into a fiber line, which is guiding the signal to a receiver terminal on the far end of the fiber line. The signal composed of a multitude of bit-patterns at different wavelength channels within a given total bandwidth of wavelengths. In order to increase the optical power budget of the system, the fiber line consists, in its first section, of at least two branches (12a, 12b). The transmitter (10) launches a separate part of the optical signal into each one of the branches (12a, 12b). Each part of the signal is composed of a sub-multitude of the bit-patterns at neighbouring wavelength channels within non-overlapping bandwidth domains. The parts of the signal are multiplexed together into one unique fiber (14) by means of a multiplexer station (13) not closer to said transmitter terminal (10), than the sum of the total optical powers guided by each of the branches (12a, 12b) plus the losses due to the multiplexing has decreased below the total optical power, that is associated with a maximum optical power budget in said unique fiber (14) guiding the full bandwidth of wavelengths.

20

Figure to publish : Figure 5





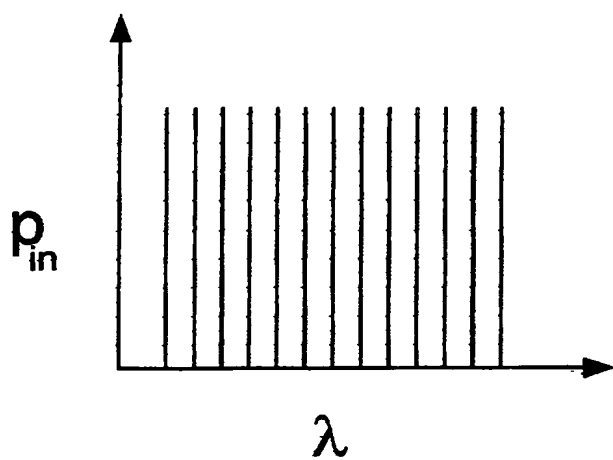


Fig. 1a

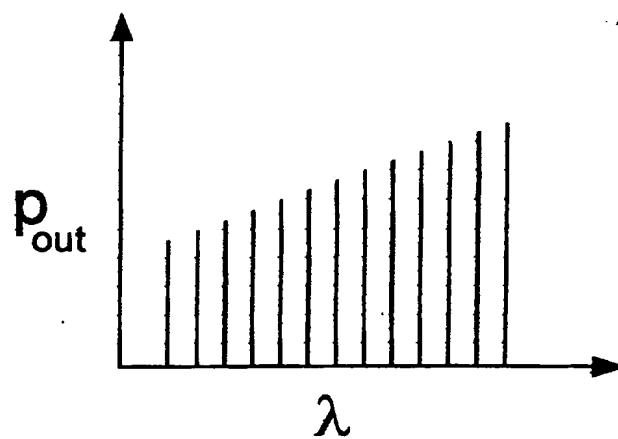


Fig. 1b

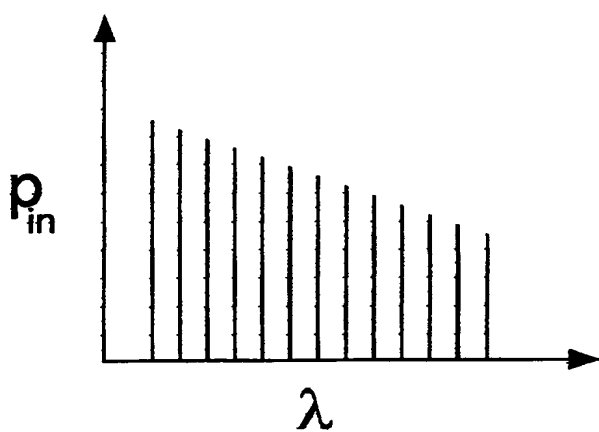


Fig. 2a

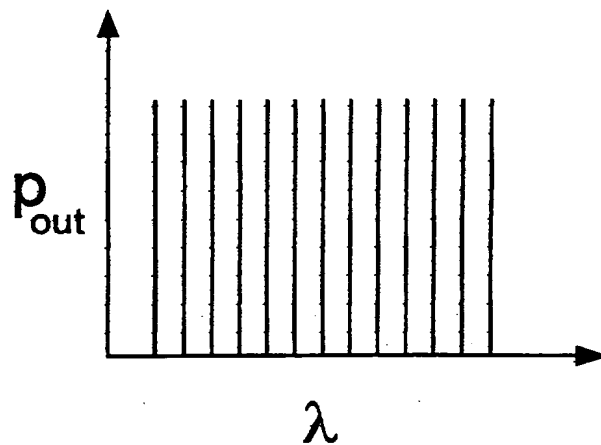


Fig. 2b

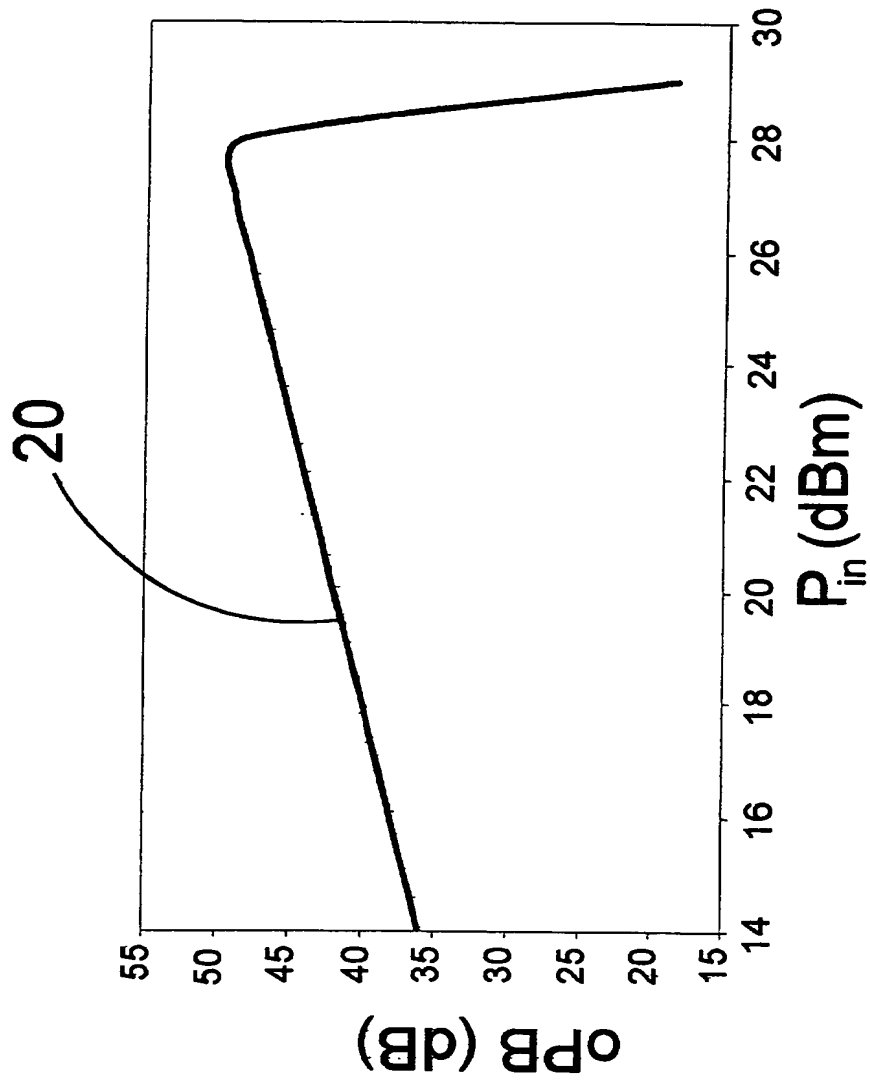


Fig. 3

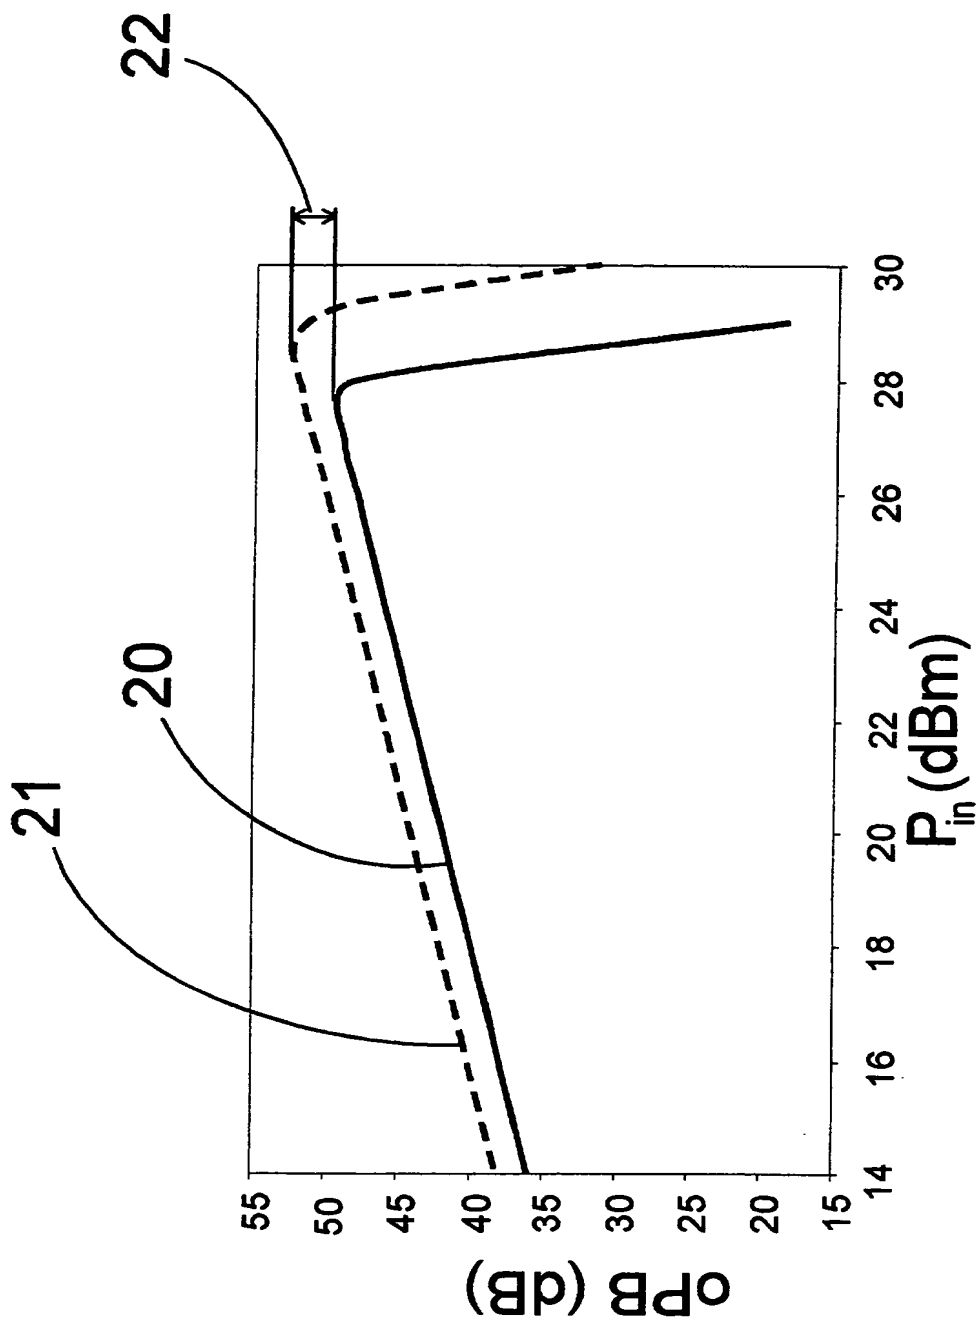


Fig. 4

